


### RED SMOOTH BRICK

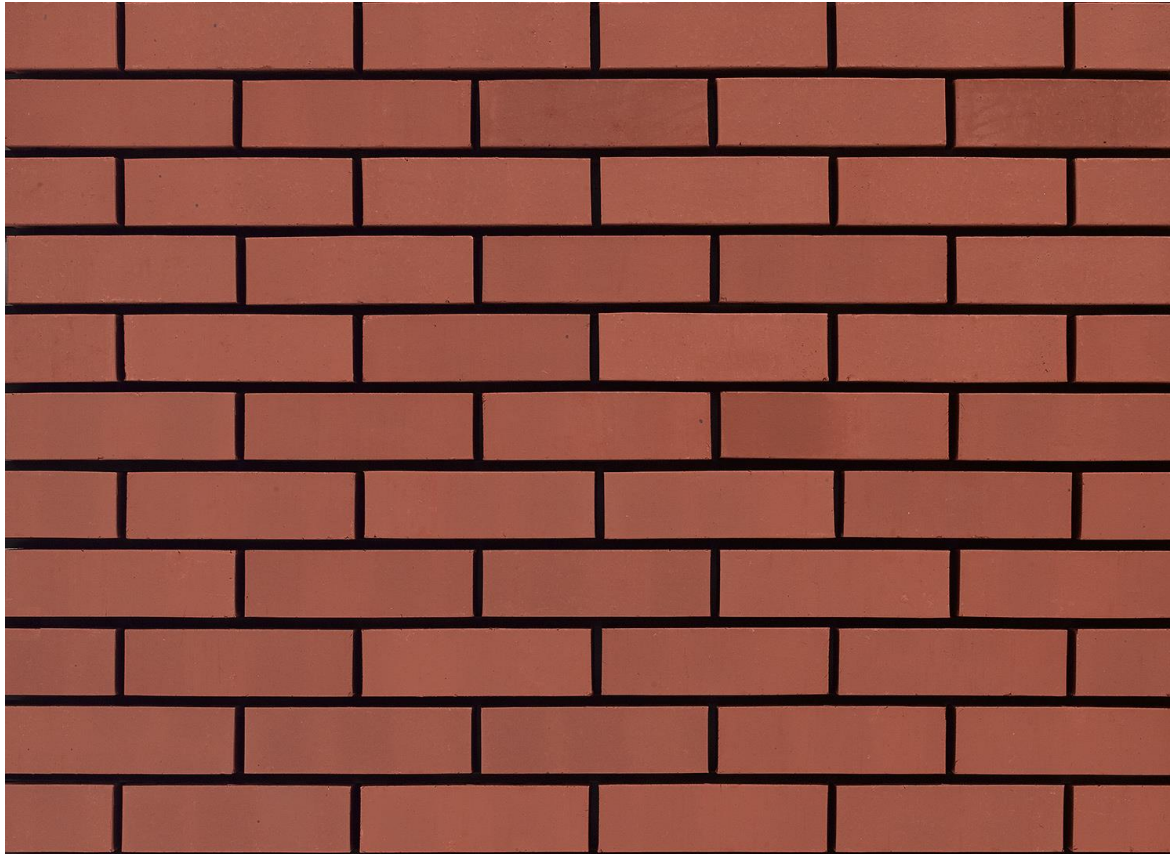

Manufacture - Manufactured in accordance with IS EN 771-1:2011

Accreditation - ISO 9001: 2015 and CE Certified

Dimensions - 215 x 102.5 x 65mm / 215 x 102.5 x 73mm

Weight - 2.10 Kg per brick

Density - 1970 Kg/m<sup>3</sup>

Tolerance/Range - T2/R1

Active Soluble Salts - S2

Frost Resistance - F2

Thermal Conductivity - 0.63 W/m.K

Reaction to Fire Class - A1

Bond Strength - 0.15 N/mm<sup>2</sup>

Average Weight of Pack - 975 Kg

Bricks per Pack – 556 / 512

Compressive Strength - ≥45 N/mm<sup>2</sup>

Water Absorption - ≤11%

#### SALES – GB

**Mark Morris - Commercial Director**

M: 07790 902 867

E: [mark.morris@breedongroup.com](mailto:mark.morris@breedongroup.com)

**Colin Jones – Regional Sales Manager**

M: 07436 284 072

E: [colin.jones@breedongroup.com](mailto:colin.jones@breedongroup.com)

Office – T: 028 92647100

E: [productsales@breedongroup.com](mailto:productsales@breedongroup.com)

#### SALES - IRELAND

Outhaus Group, Unit 26,  
Airways Industrial Estate, Santry,  
Dublin 17, D17 TH93.

T: +353 (0) 1 844 1205

E: [info@kcmb.ie](mailto:info@kcmb.ie)

[www.kcmb.ie](http://www.kcmb.ie)

#### MANUFACTURING

Drumgill,  
Kingscourt,  
Co. Cavan

T: (042) 966 7317

[www.kingscourtbrick.com](http://www.kingscourtbrick.com)

#### DISCLAIMER:

The reproduction of colours and textures is only as accurate as the printing process will allow. Photographic samples should be used when shortlisting products but we advise that an actual sample should be seen before ordering.