KINGSCOURT BRICK

Part of the Breedon Group

Georgian Red Smooth 65mm

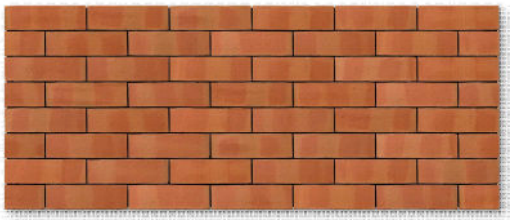

DECLARATION OF PERFORMANCE

Intend for use in facing and rendered masory applications, including internal linings and partition walls within builidng and civil engineering projects.

Water absorption performance is enhanced through hydrophobic properties incorporated during manufacture.

Declared Performance Essential Characteristics	Performance		Harmonised Technical Specification
Product Code	KBM0041		I.S EN771-1:2011/A1/2015
Date of Manufacture	As per manufactured		
Date of Batch	As per production run		
Dimensions and tollerance mm	215 mm X 102.5 X 65 mm		
	Tolerance	T2	
	Range	R1	
Compressive strength (tested normal to the bed face of the unit) N/mm2	Mean	≥30-35% N/mm^2 28-33% Perforated	ISO9001:2015 and CE Certified NSAI 0050-CPR-0549
	Density	1970kg/m^3	
	Category	Cat I	
Bond Strength fixed N/mm^2	0.15N/mm^2		
Active Soluble Salts	S2		
Reaction to Fire	Euro Class A1		
Water absorption %	≤10%		Commission decision 2000/605/EC
Thermal conductivity W/mk	0.63 W/mK		
Durablity against freeze thaw	F2		
Average Weight	1.98kg		
Bricks per pack	556		

The perforamance of the product is in conformity with the declared performance.
This declaration is issued under the sole responsibility of the manufacturer.

Signed for and on behalf of the manufacturer by :

Barry O'Reilly

Factory Manager